



Flexible light

**Up to
3 meters**

High Speed

MegaStrobe™

Easy-to-mount

**Adjustable
angle**



effiFLEX-LG

Ultra high-power logistic bar light

PART NUMBER KEY

STANDARD VERSION

EFFI-FLEX-LG	- XXXX	- ZZZ	- WW	- PP
	Optical Length (mm)	Wavelength (nm)	Window	Lens position
	200	● 465 (Blue)	LD (Lightly-diffuse)	P0 (90°)
	400	● 625 (Red)	SD (Semi-diffuse)	P1 (45°)
	... All 200mm	● 850 (Infrared)	OP (Opaline)	P2 (25°)
	1400	○ 000 (White)		P3 (10°)

AVAILABLE OPTIONS: REFERENCES

OPTICS	
Kit with all diffusers	EFFI-FLEX-LG-XXXX-ZZZ- KIT The light is delivered assembled in the default configuration with the lens plate positioned at Position 2 (25°) and the Lightly-diffusive window.
Polarizer accessory	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- POL
Custom wavelength	EFFI-FLEX-LG-1000- ZZZ -WW-PP Other wavelengths upon request. <i>Please contact Efflux.</i>
ELECTRONICS	
Customized software (Strobe length & frequency modification)	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- SWxxxxxx Specific reference xxxxxx for each customized software. <i>If the device consumption exceed 150W, regulations' compliancy may be impacted, please contact Efflux.</i>
External power supply Version	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- CPW-SWxxxxxx Customized software mandatory. <i>Please contact Efflux.</i>
Daisy Chain Version	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- CHS Number of chainable bars depending on the software version, see Annex. <i>Please contact Efflux.</i>
Daisy Chain Version with output female connector on the opposite cap	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- CHO Number of chainable bars depending on the software version, see Annex. <i>Please contact Efflux.</i>
NPN trigger Version	EFFI-FLEX-LG-XXXX-ZZZ-WW-PP- NPN NPN trigger on pin 2 instead of PNP trigger on pin 4
MECHANIC	
Longer length (Up to 2800mm)	EFFI-FLEX-LG- XXXX -ZZZ-WW-PP <i>If the device consumption exceeds 150W, regulations' compliancy may be impacted, please contact Efflux.</i>

TECHNICAL SPECIFICATIONS

effiFLEX-LG

Illumination Mode	Ultra High-Power Strobe <i>(Strobe only)</i>				
Wavelengths	465nm, 625nm, 850nm (+/- 5%) <i>(Other wavelength upon request)</i> White (5500K ±500K)				
Power Supply	24V DC +/- 10%				
Connector configuration	Standard		CPW	CHS	CHO
Connector(s)	INPUT (male)	M12 - 5pins or M12Power (T-Coded) - 4pins	MAIN: M12 - 5pins AUX: M12 - 5pins or M12Power - 4pins	M12 - 5pins or M12Power - 4pins	M12 - 5pins or M12Power - 4pins
	OUTPUT (female)	None	None	M12 - 5pins or M12Power - 4pins (same than INPUT)	M12 - 5pins or M12Power - 4pins (same than INPUT)
Power Consumption	Average	Approx. 20W for each 200mm - See page 6 <i>(Can be modified via customized software)</i>			
	Peak (Max.)	6A max for XXXX ≤ 800mm - 12A max for XXXX ≤ 1600mm - 18A max for XXXX ≤ 2400mm - See page 6 Exact value indicated on the product label <i>(Can be modified via customized software)</i>			
Built-in driver version	MegaStrobe™ feature				
Response Time	< 1µs				
Frequency	Internal Frequency protection: 150Hz Max (Standard electrical configuration) <i>(Can be modified via customized software)</i>				
Strobe duration	Internal Strobe length protection: 400µs Max (Standard electrical configuration) <i>(Can be modified via customized software)</i>				
Input signal	PNP trigger input: Light ON: from 4V to 24V / Max. signal consumption: 2mA <i>(Option NPN: Light ON: from 0V to 1.5V / Max. signal consumption: 2mA)</i>				
Weight	Please refer to General Drawing				
Dimensions	60mm x 47mm x Length = Optical length + 35mm (Please refer to General Drawing)				
Material	Device body: Aluminum alloy & ABS / Window and caps: PMMA				
Fastener	One T-slot on the back for M6 T-nuts 8mm slot (2x M6 T-nuts included)				
IP rating	IP5X (dust protected)				
Operation environment	Temperature: 0°C to 40°C - Humidity: 20 to 85%RH (with no condensation) - Altitude: Up to 2000m				
Storage environment	Temperature: -20° to 60°C - Humidity: 20 to 85%RH (with no condensation)				
Informations	Overvoltage category I - Protective class III - Pollution degree 3				
Regulations & Marking	CE - UKCA - FCC - ICES-3/NMB-3 - cTUVus (The supply of the device has to fulfill SELV and Limited Energy according IEC 61010-1 9.4)				
Environmental Standards	RoHS Directives (2011/65/EU, 2015/863/EU and China RoHS) - REACH Regulation - WEEE Regulation				
Country of Origin	France				

OPTICAL SPECIFICATIONS

MANY POSSIBLE CONFIGURATIONS IN JUST ONE LIGHT

Diffusers

LD : Lightly-diffuse

SD : Semi-diffuse


OP : Opaline



Depending on the uniformity needed for the application, the user can easily change the diffuser to one that fulfills the application requirements.

Lens position

The EFFI-Flex-LG offers flexible lens positioning to control the beam angle. The user can adjust it by himself: the angle can be widened by moving the lens closer to the LEDs or narrowed by moving the lens further away from the LEDs.

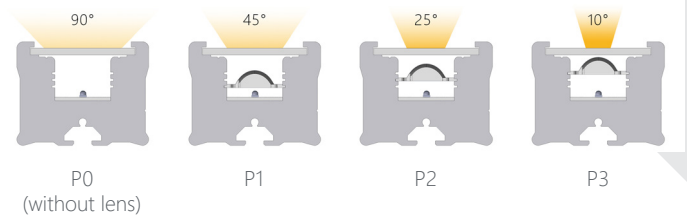

How to change the optical configuration of your EFFI-Flex-LG?

The EFFI-Flex-LG offers flexible lens positioning to control the beam angle and different type of diffusers to adapt the uniformity. The user can easily change the diffuser and the lens position.




Unscrew the M4 screws and remove the cap (without connector)

Slide out the window and all lenses

Place the lenses & window in desired configuration


OPTICAL IMPACT

Lens position VS Illuminated area

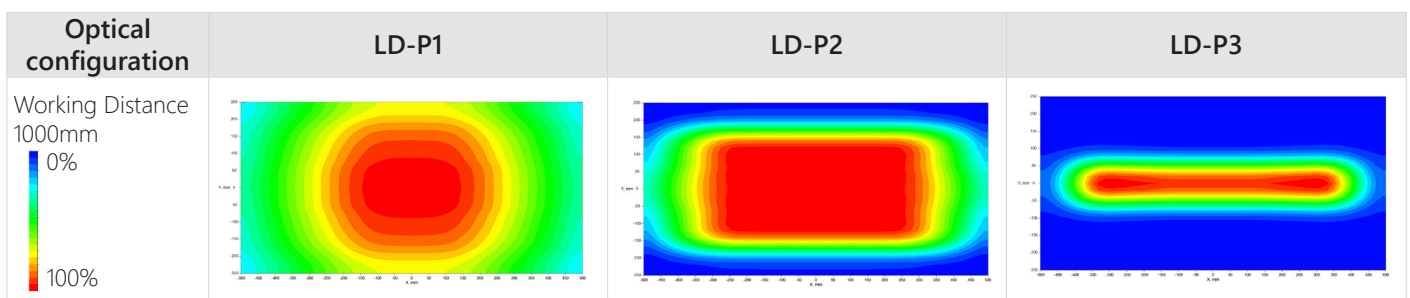

OPTICAL IMPACT

Lens position VS Illuminance

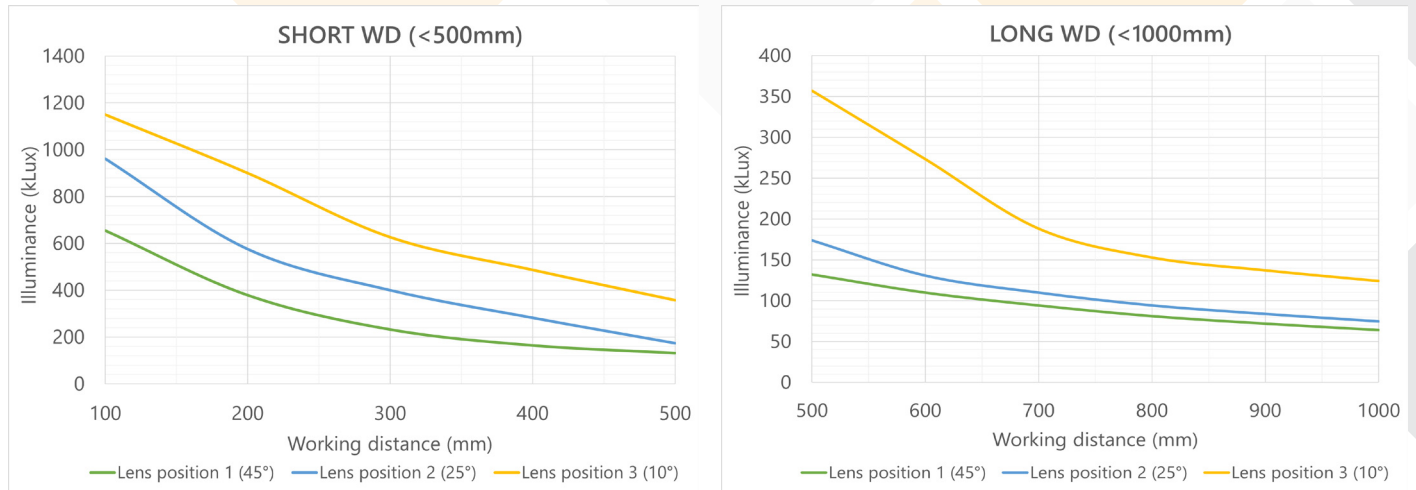

Note: Measurement done with a White 800 mm light, LD window

OPTION: POLARIZER ACCESSORY

Using polarizers, on the Efflux light and on the camera, it is possible to eliminate glare from your workpiece making it easier to acquire a suitable image for the application. The user can insert directly the polarizer inside the EFFI-Flex-LG, under the window.



Without polarizer




With polarizer

Important note: The polarization is optimal with an LD window, the use of diffuser (SD or OP) can depolarize the light.

MECHANICAL SPECIFICATIONS

DIMENSIONS (in mm)

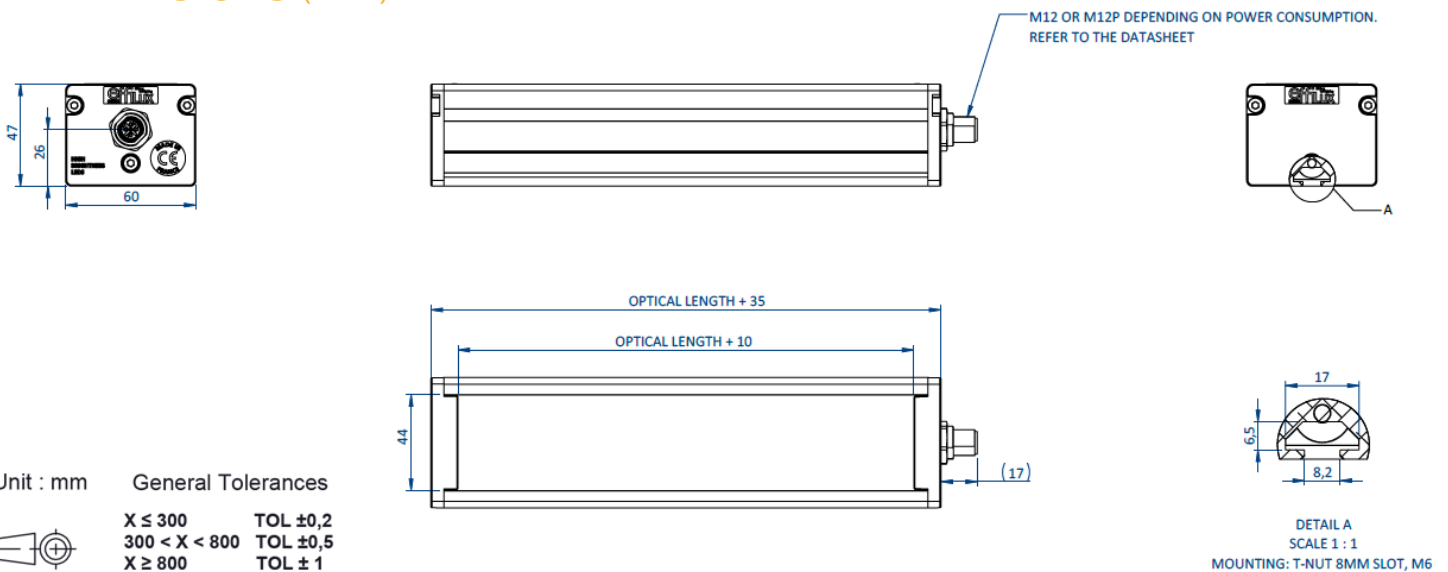


ELECTRONICAL SPECIFICATIONS

WIRING LAYOUT - STANDARD CONNECTOR VERSION

- The EFFI-Flex-LG requires 24V DC input power.
- The trigger pin needs to be connected to a PNP trigger signal.
- If a continuous signal is applied to the PNP trigger pin, the output light is strobed by default at maximum Frequency and Strobe length (150 Hz - 400 μ s), although it appears continuous for human eye.


M12 - 5 pins

male connector

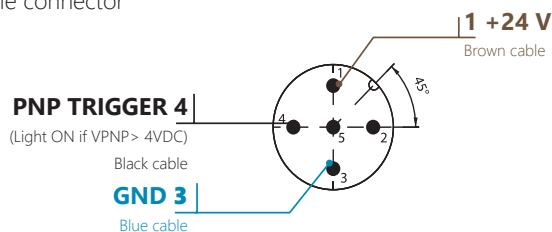

M12 Power (T-coded) - 4 pins

male connector

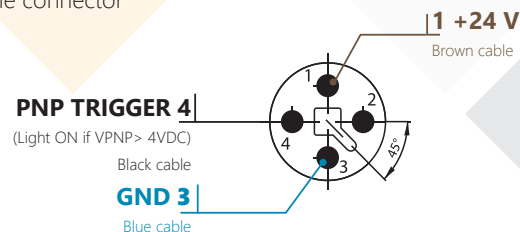

POWER CONSUMPTION & CONNECTOR DEFINITION

The EFFI-Flex-LG integrates **boosters technology** to limit the power consumption.

Depending on the average power consumption, the EFFI-Flex-LG comes with a **standard M12 connector** or an **M12 Power T-coded connector**. The values below are maximum values, the exact power consumption of the product is always indicated on the product label.

MAX POWER CONSUMPTION (+/- 5%) at 150Hz - 400 μ s (Red version - Standard software - 2 meters cable)														
Optical Length XXXX (mm)	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800
Average power consumption	20W	40W	60W	80W	100W	120W	140W	160W	180W	200W	220W	240W	260W	280W

Note: These values may change for the products with a customized software.


M12 5 pins	M12 Power 4 pins
---------------	---------------------

INITIALIZATION PHASE

When EFFI-Flex-LG is supplied, the product first enters in a few seconds initialization phase. This initialization is a sequence of very short strobes of increasing intensity. Please wait until the end of this initialization to use the product (max 5 seconds).

MEGASTROBE FEATURE

The integrated driver with MegaStrobe feature allows Ultra high-power strobes.

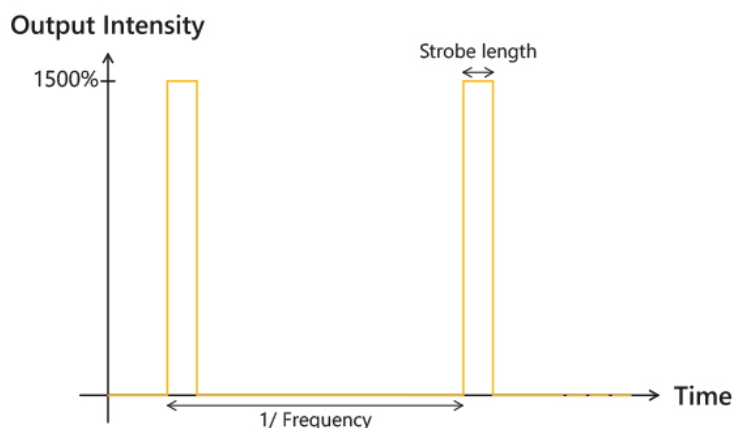

MegaStrobe	
Strobing time (internal protection)	400 μ s max
Frequency (internal protection)	150Hz max
Rising time	<1 μ s
Falling time	<2 μ s


ACCESSORIES

Please refer to the specific documentation for additional information on the accessories of the EFFI-Flex-LG.



Diffusers

Lightly-diffuse: EFFO-FLEX2-LD-XXXX
Semi-diffuse: EFFO-FLEX2-SD-XXXX
Opaline: EFFO-FLEX2-OP-XXXX

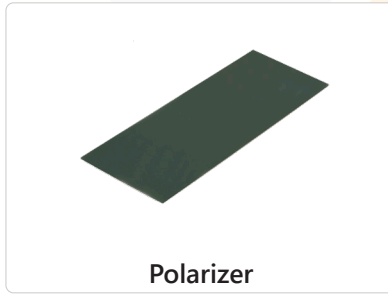


Polarizer

EFFO-FLEX2-POL-XXXX



Extension Cables

2meters: EFFC-CAB-M12-FM-5-DD-L2
5meters: EFFC-CAB-M12-FM-5-DD-L5
10meters: EFFC-CAB-M12-FM-5-DD-L10

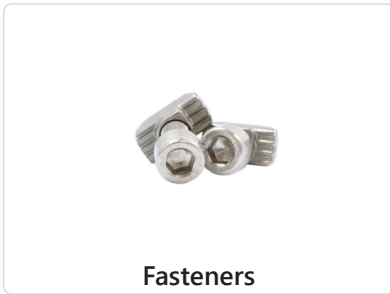

Fasteners

T-Nut Kit: EFFV-BOLT-0011
Pivot joint Kit: EFFM-1-0002



Power supplies

Power supply: EFFI-PWR- ...
Compact power supply:
EFFI-SPWR-090W-24V-102-YY**



Camera Filters

EFFO-FLR-...


*YY = Type of outlet UK, CH, EU, US, ...

CUSTOMIZATION

Please ask your sales contact for a custom device.



Extra power

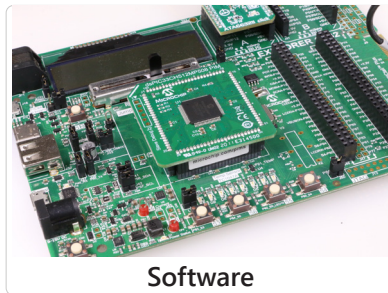

Software



Caps color

CONTACT INFORMATION

Please refer to the specific documentation (datasheet, user manual and drawing) for complementary information. Contents of this document are based on information available as of Jan-2022 and may be changed without prior notice.



EFFILUX
1, Rue de Terre Neuve
Mini Parc du Verger - Bâtiment E
91940 Les Ulis - FRANCE

Tel: +33 9 72 38 17 80
Fax: +33 9 72 11 21 69
Mail: sales@effilux.fr

Copyright 2022 Effilux - All rights Reserved

ANNEX: CPW CONNECTOR VERSION

SMARTSENSE FUNCTION

The EFFI-Flex-LG CPW version has 2 operating modes and 2 M12 connectors. Depending on the wiring, the light can be used either with direct connection to the camera or with an additional external power supply for longer strobes. A custom software is needed to define those two specific modes, depending on the camera and external power supply characteristics.




MAIN CONNECTOR
(camera)
AUXILIARY CONNECTOR
(ext. power supply)


The EFFI-Flex-LG CPW detects **automatically** the operating mode, Thanks to this **SmartSense** function, the user can easily shift from standard mode to power mode (longer strobes) just by connecting the additional power supply:

- **Mode 1** (Direct connection): Connect only the **Main connector** to the camera.
- **Mode 2** (Longer strobe pulse): Connect also the **Auxiliary connector** to an external power supply.

Mode 1

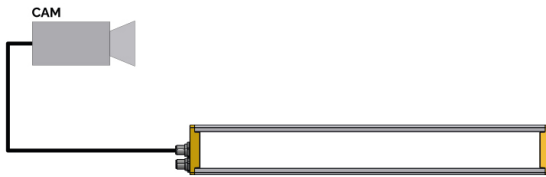

Mode 2

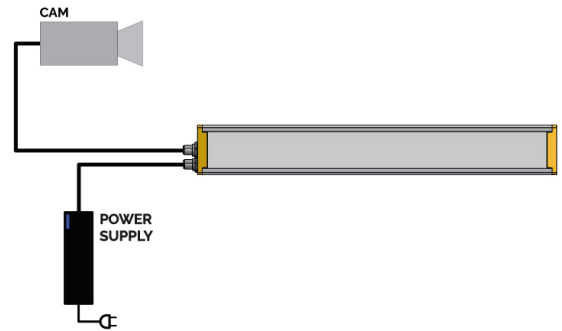


WIRING LAYOUT - EXTERNAL POWER SUPPLY CONNECTOR VERSION

The EFFI-Flex-LG CPW requires 24V DC input power. Note the trigger pin needs to be connected to a PNP trigger signal.


M12 - 5 pins - MAIN CONNECTOR

male connector

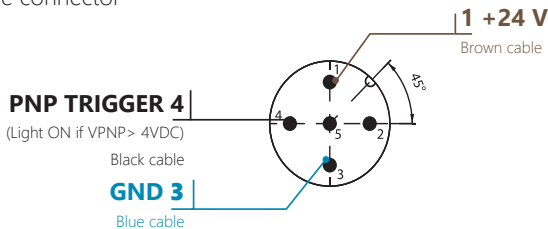

M12 - 5 pins - AUXILIARY CONNECTOR

male connector

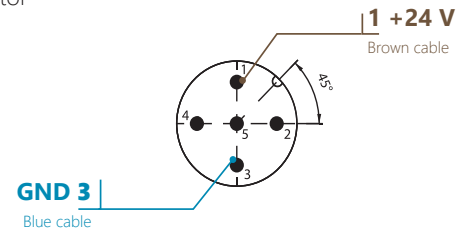

ANNEX: DAISY-CHAIN VERSIONS (CHS / CHO)

DAISY-CHAIN CONFIGURATION

You can chain several EFFI-Flex-LG-CHS by connecting the output connector directly to the next EFFI-Flex-LG bars. The EFFI-Flex-LG-CHS / EFFI-Flex-LG-CHO requires the use of a standard 5 pin M12 cable (or a 4 pins M12 Power cable depending on the product's connector) to effectively chain the lights.


The number of bars possible to chain depends on the product software and the cables' length.

With the standard software and 1 meter cables, the number of chainable products is:



Connector configuration (OUTPUT connector with the same pinout specification than INPUT connector)		Max number of chainable product VS Size						
INPUT Connector	OUTPUT Connector	200mm	400mm	600mm	800mm	1000mm	1200mm	1400mm
1x M12 - 5 pins male	1x M12 - 5 pins female	4	2	X	X	X	X	X
1x M12P - 4 pins male	1x M12P - 4 pins female female	14	7	4	3	2	2	2

CHS VERSION

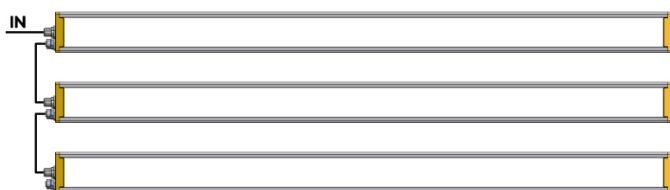

CHO VERSION

