

shr661CXGE

SHR 10GigE



The high resolution SHR series offers outstanding image quality. This is made possible by the excellent physical characteristics of large pixels in large format sensors. The thermally highly optimized housing guarantees highest optical precision. The large M72 lens mount can be adapted to any lens.

The economical and high-performance 10 GigE interface offers high data transfer speeds of up to 1.1 GB/s for these large images. A special frame grabber is not required.

Technical Highlights

- > User defined shading correction
- > Automatic and user defined pixel correction
- > High color depth
- > Extremely low noise
- > Excellent dynamic range
- > high performance 10GigE interface
- > Integrated 4-channel LED strobe controller
- > Industrial TTL-24V I/O Interface with SafeTrigger, programmable logic functions, sequencers and timers, RS232

SVS-Vistek GmbH - Ferdinand-Porsche-Str. 3 - 82205 Gilching - Germany - Telephone +49 8105 3987-60

Information accurate as to: 16.11.2022, errors and omissions excepted.

© 2022 – SVS-Vistek GmbH, all rights reserved.

SHR Series

shr661CXGE

Resolution [MP]	127.6 MP
Resolution (h x v)	13392 x 9528 px
Frame rate (max.)	8.2 fps
Chroma	color
Interface	10GigE

Sensor

Sensor	IMX661LQA
Manufacturer	Sony
Sensor type	Area CMOS
Shutter type	global shutter
Sensor size (h x v)	46.2 x 32.87 mm
Optical diagonal	56.7 mm
Sensor format	56.73mm (Type 3.6)
Pixel size (h x v)	3.45 x 3.45 μm

Camera

Exposure modes	MANUAL;AUTO;EXTERNAL
Trigger modes	INTERNAL;SOFTWARE;EXTERNAL
Exposure time (min)	163 μs
Exposure time (max)	1 sec (external ∞)
Pixel format / max	bayer8, bayer12packed / 12 bit
Gain modes	manual, auto
Internal memory	512 MB SDRAM, 32 MB Flash

Feature Set

Manual white balance	yes
Automatic white balance	yes
LUT	yes
Offset	yes
Binning	yes
Image flip	yes
Shading correction	yes (external)
Defect pixel correction	yes
Sequencer	yes
POE	yes (POE+)(optional)


Housing

Lens mount	M72x0,75
Dimensions (w x h x d)	80 x 80 x 83 mm
Weight	580 g
Operating temperature (housing)	-10 to 60 °C
Ambient humidity	10 to 90 % (non-condensing)
Protection class	IP30

I/O-Interfaces

Input up to 24V	2 x
Input OPTO	1 x
Output open drain	4 x
I/O RS-232	1 x

Dimensions [mm]

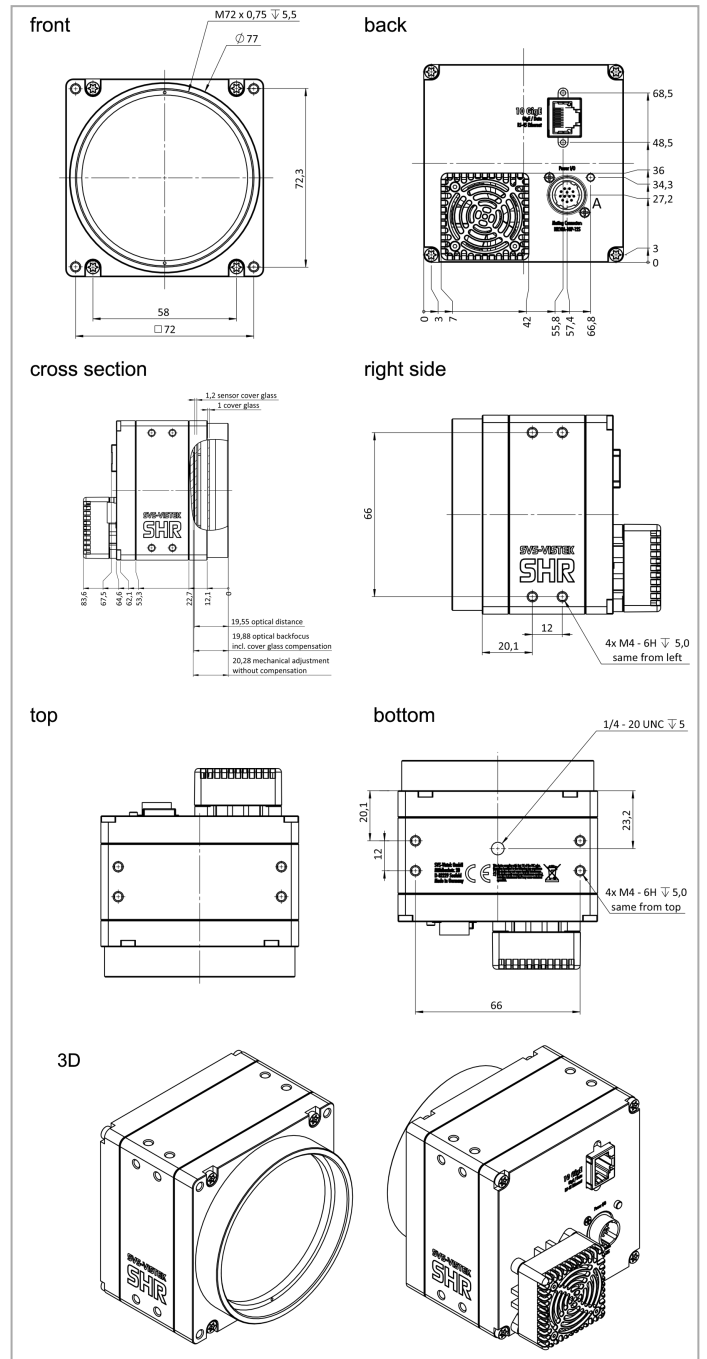

Pinout Mating Connector

