

LTCLHP096-G

Telecentric HP illuminator, beam diameter 120 mm, green

Optical specifications

Beam diameter	(mm)	120
Working distance range	(mm)	200 ~ 250
Light color, peak wavelength		green, 520 nm

Mechanical specifications

Length (1)	(mm)	322.2
Outer diameter	(mm)	143
Mass	(g)	2161

Electrical specifications

Device power ratings


DC voltage minimum	(V)	12
DC voltage maximum	(V)	24
Power consumption	(W)	< 2.5
Max LED forward current (2)	(mA)	350

LED power ratings

Forward voltage (typical) (3)	(V)	3.3
Forward voltage (max) (3)	(V)	4.00
Max pulse current (4)	(mA)	2000

Compatible telecentric lenses

Compatibility	TC13096, TC12085, TC12096, TC4M085, TC4M096, TC2M096, TC16M096
---------------	--

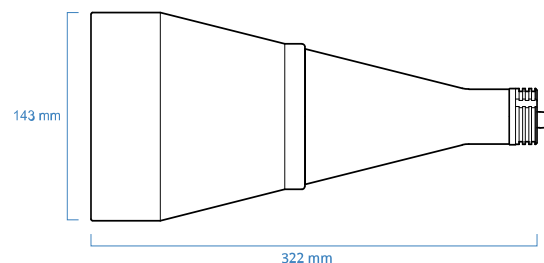

NOTES

1. Nominal value, with no spacers in place.
2. Used in continuous (not pulsed) mode.
3. At max forward current. Tolerance is $\pm 0.06V$ on forward voltage measurements.
4. At pulse width ≤ 10 ms, duty cycle $\leq 10\%$ condition. Built-in electronics board must be bypassed (see tech info).

COMPATIBLE PRODUCTS



CMHO 096
Clamping mechanics for TCxx085, TCxx096 lenses and LTCL096-X illuminators



LTSCHP 1W-G
Replacement LED module, green



LED1W-G
Replacement LED source for LTSCHP1W series, green



CB244P1500
Power cable for LTSCHP1W LED modules