
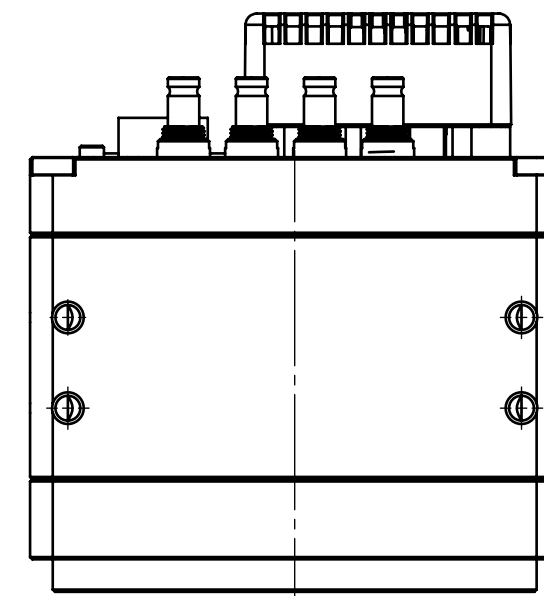
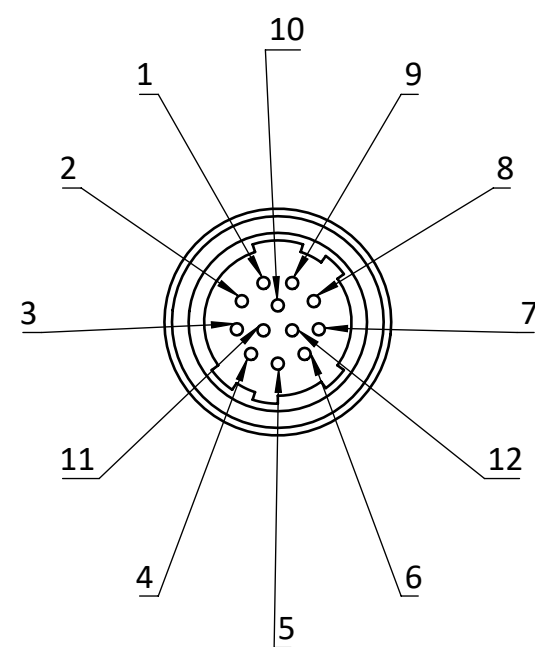
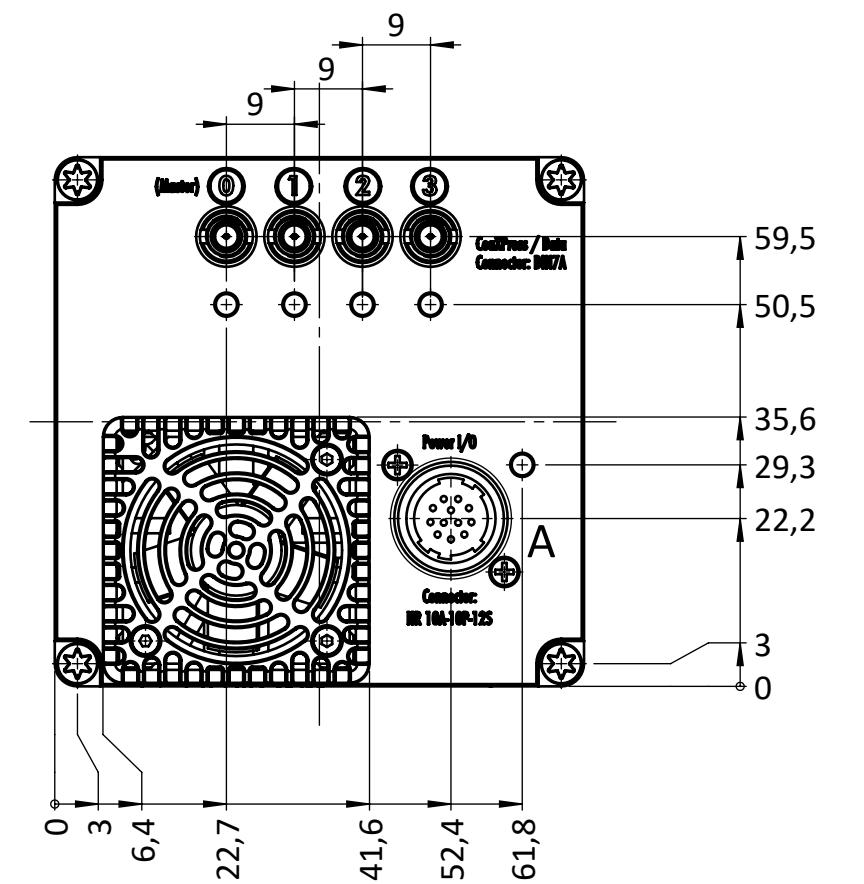
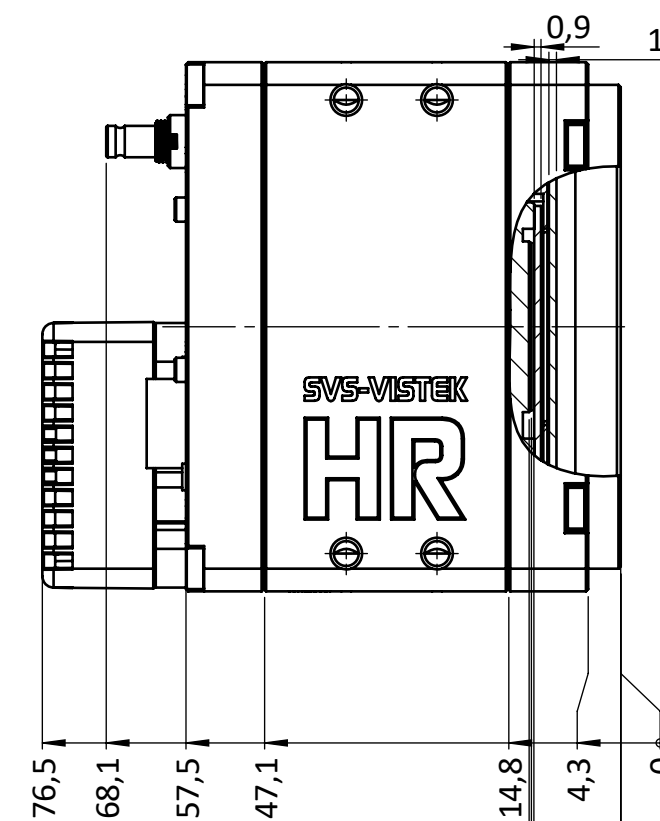
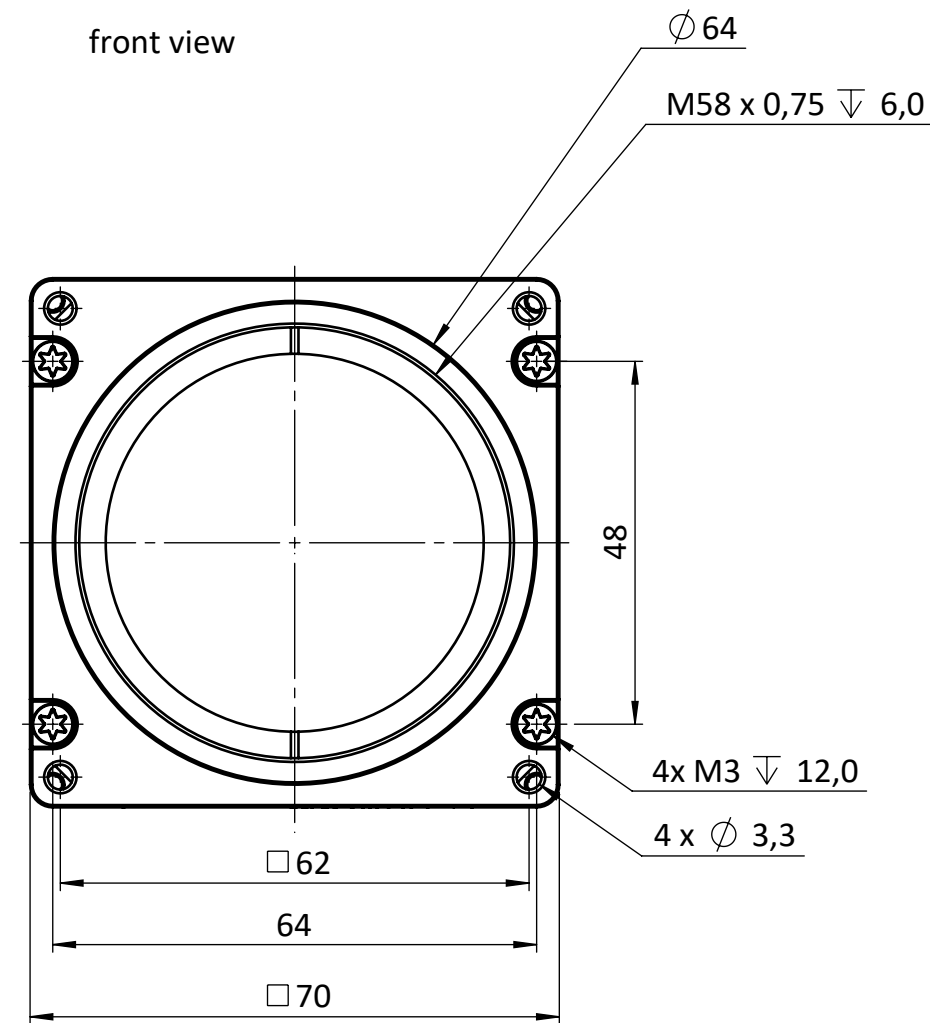
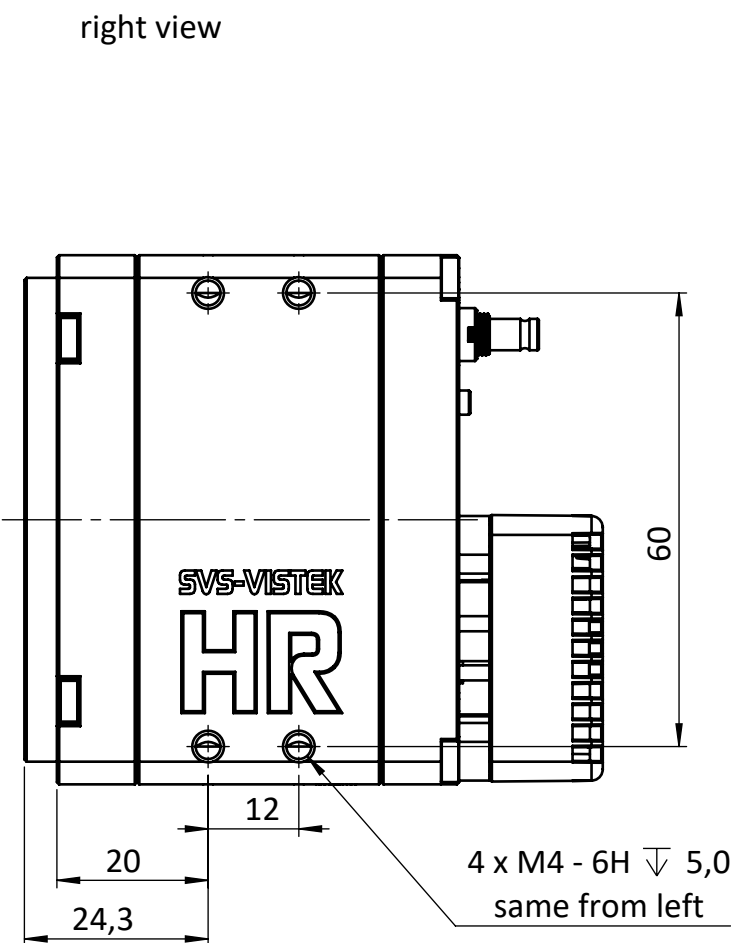
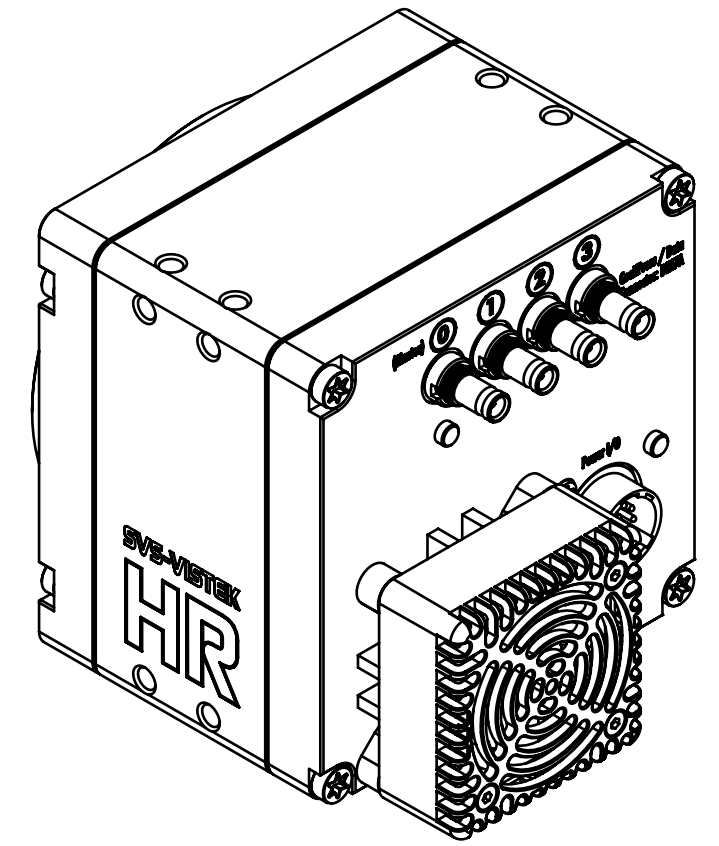
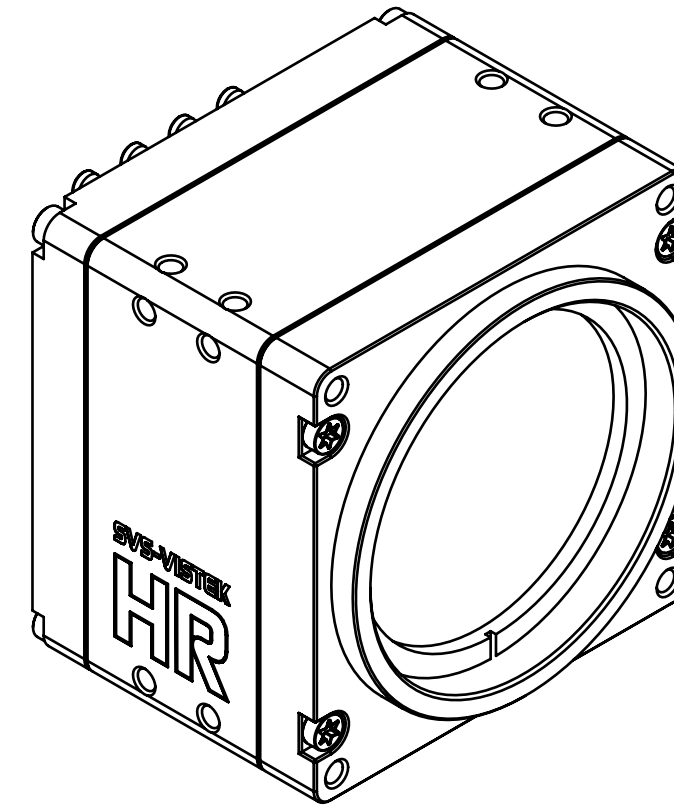


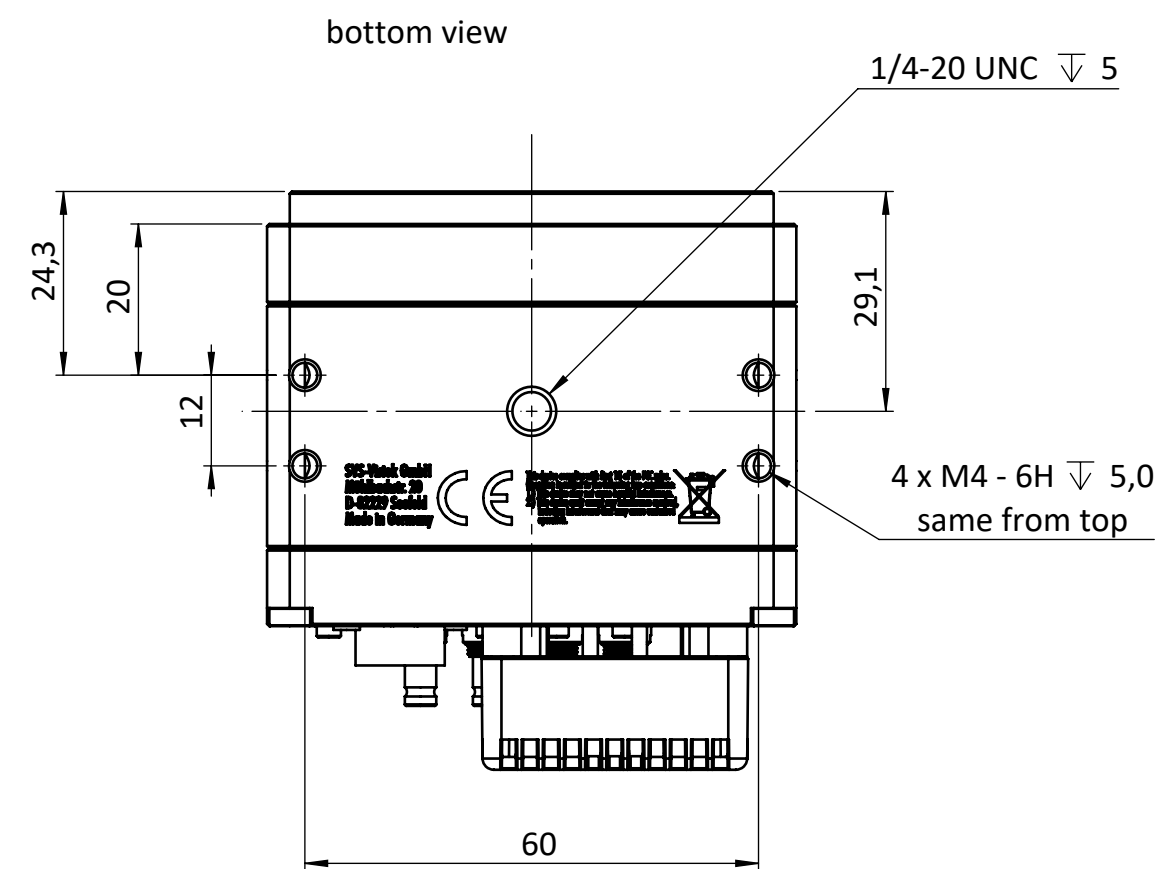

DETAIL A
MAßSTAB 2 : 1

	Hirose Pinout	
	EXO, FOX, HR	(CL Deca, CXP), SHR
Pin	Signal	EXO, HR (CL Deca, CXP), SHR
1	V IN-	(GND)
2	V IN+	(10 - 25V)
3	IN 4	RxD (RS232)
4	OUT 4	TxD (RS232)
5	IN 1	(0 - 24V)
6	IN 2	(0 - 24V)
7	OUT 1	(open drain)
8	OUT 2	(open drain)
9	IN 3+	(opto IN+)
10	IN 3-	(opto IN-)
11	OUT 3	(open drain)
12	OUT 0	(open drain)
	Shielding	

drawing applies to cameras
HR49MCX
HR65MCX
HR65CCX

 SVS-VISTEK		all dimensions in mm unless otherwise specified		Scale: 1:1		Rev.: 1	
Customer Interface Drawing							
Name		Sign.		Date			
S.Seiler				22.06.2021			
Drawn						Title: HR49_65xCX	
Checked							
				Material:		Material No.:	
						A2	
				Weight:		Blatt/Sheet 1 / 1	