



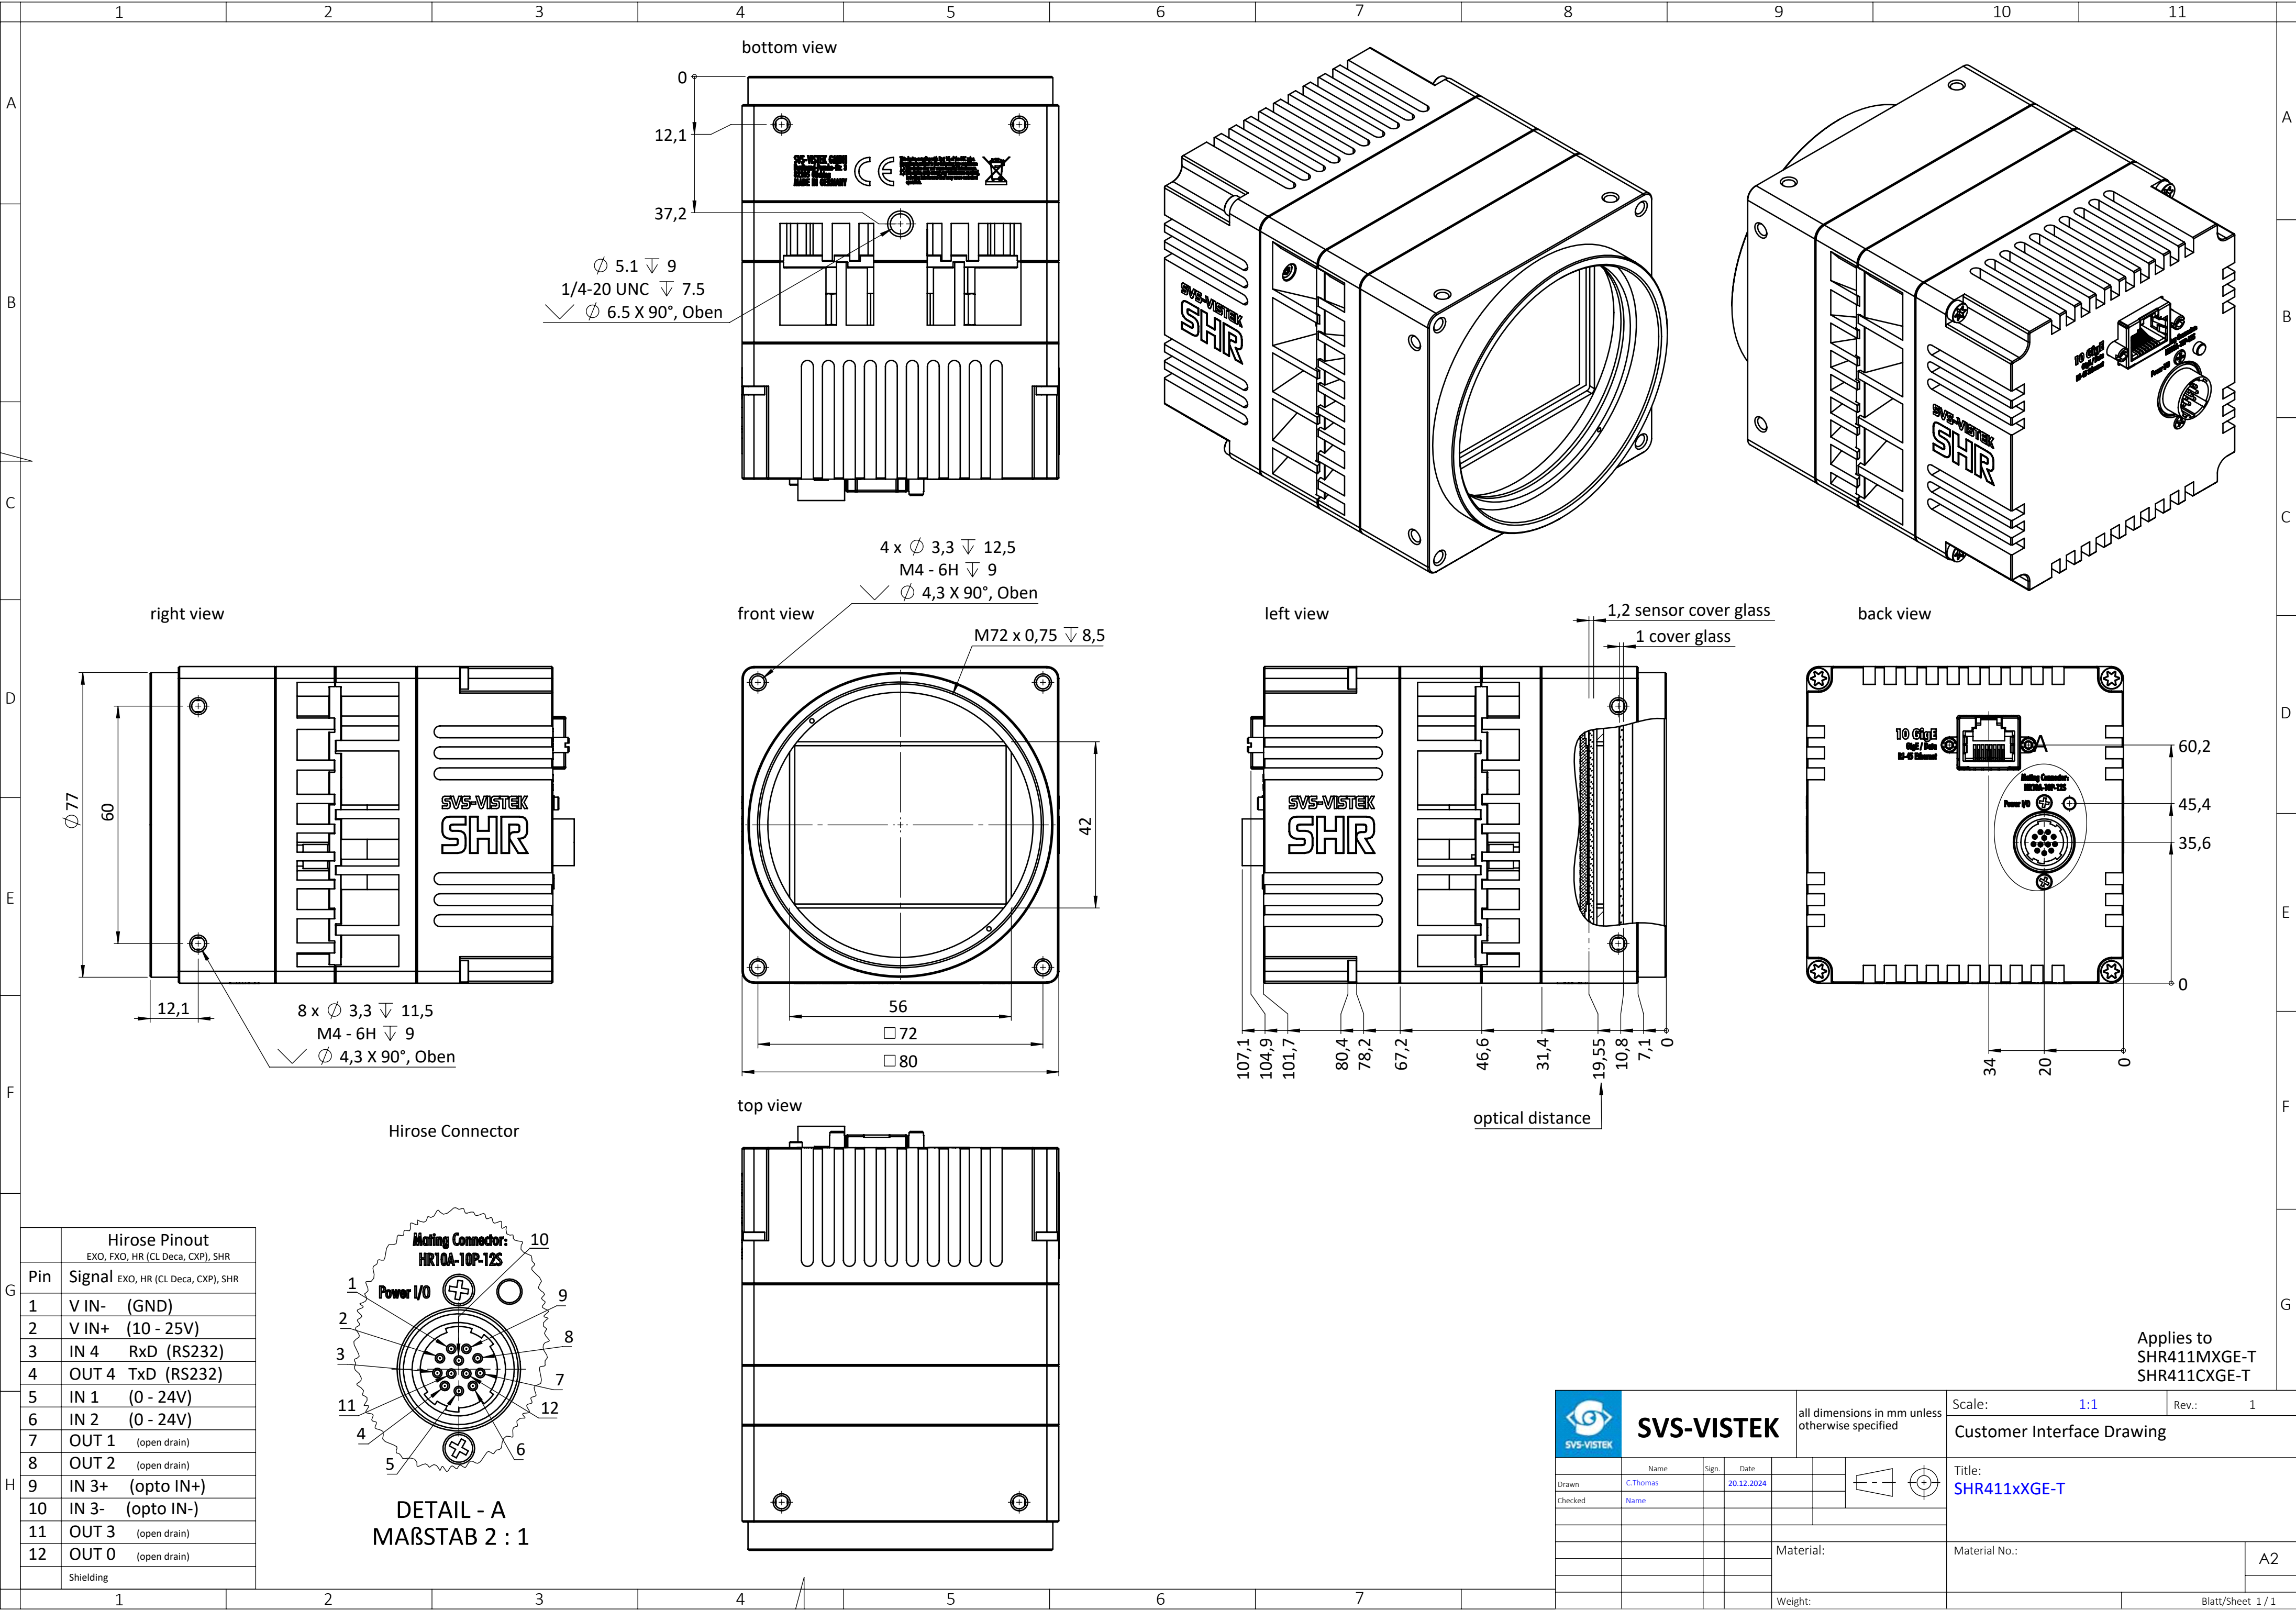

Pin	Hirose Pinout	
	Signal	EXO, FXO, HR (CL Deca, CXP), SHR
1	V IN- (GND)	
2	V IN+ (10 - 25V)	
3	IN 4 RxD (RS232)	
4	OUT 4 TxD (RS232)	
5	IN 1 (0 - 24V)	
6	IN 2 (0 - 24V)	
7	OUT 1 (open drain)	
8	OUT 2 (open drain)	
9	IN 3+ (opto IN+)	
10	IN 3- (opto IN-)	
11	OUT 3 (open drain)	
12	OUT 0 (open drain)	
	Shielding	

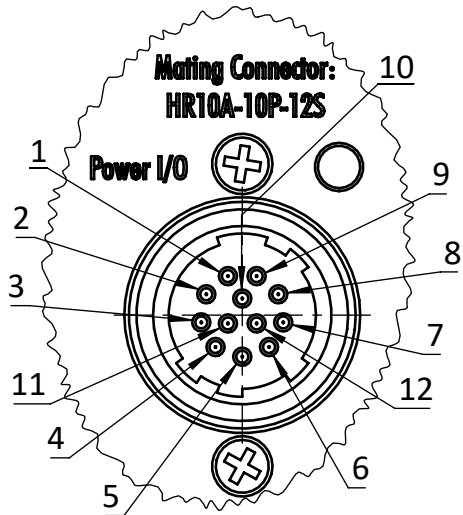

DETAIL - A
MARSTAB 2 : 1

	SVS-VISTEK					all dimensions in mm unless otherwise specified		Scale: 1:1		Rev.: 1	
								Customer Interface Drawing			
Drawn	Name		Sign.	Date				Title: SHR411xXGE-T			
	C.Thomas			20.12.2024							
Checked	Name										

Applies to
SHR411MXGE-T
SHR411CXGE-T