


## GT3400/3400C

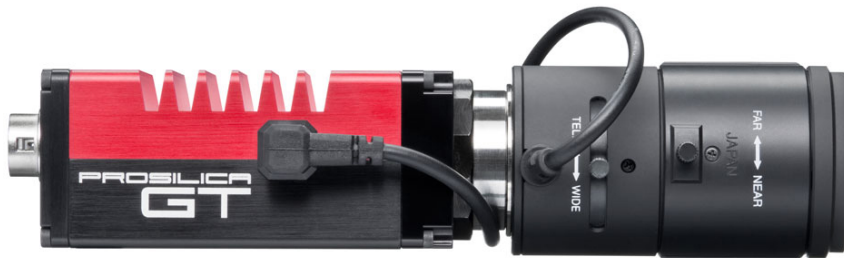

### Description

#### 9 Megapixel CCD camera for extreme environments - GigE Vision®



The Prosilica GT3400 is a 9 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT3400 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. It offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements.

- Sony ICX814 sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, multiple LUT, color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- **Models:**
  - GT3400, 3384 x 2704, 12.7 fps, CCD mono
  - GT3400C, 3384 x 2704, 12.7 fps, CCD color

## Specifications

<b>Prosilica GT</b>		<b>3400</b>	
<b>Interface</b>	IEEE 802.3 1000baseT		
<b>Resolution</b>	3384 x 2704		
<b>Sensor</b>	Sony ICX814		
<b>Sensor type</b>	CCD Progressive		
<b>Sensor size</b>	Type 1		
<b>Cell size</b>	3.69 $\mu\text{m}$		
<b>Lens mount</b>	C-Mount (adjustable)		
<b>Max frame rate at full resolution</b>	12.7 fps		
<b>A/D</b>	14 bit		
<b>On-board FIFO</b>	128 MB		
<b>Output</b>			
<b>Bit depth</b>	14 (mono) - 12 (color) bit		
<b>Mono modes</b>	Mono8, Mono12, Mono12Packed, Mono14		
<b>Color modes YUV</b>	YUV411Packed, YUV422Packed		
<b>Color modes RGB</b>	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed		
<b>Raw modes</b>	BayerRG8, BayerRG12, BayerRG12Packed		
<b>General purpose inputs/outputs (GPIOs)</b>			
<b>TTL I/Os</b>	1 input, 2 outputs		
<b>Opto-coupled I/Os</b>	1 input, 2 outputs		
<b>RS-232</b>	1		
<b>Operating conditions/Dimensions</b>			
<b>Operating temperature</b>	-20°C ... +60°C		
<b>Power requirements (DC)</b>	PoE, or 7-25 VDC		
<b>Power consumption (12 V)</b>	5.4 W @ 12 VDC		
<b>Mass</b>	224 g		
<b>Body Dimensions (L x W x H in mm)</b>	92 x 53.3 x 33 mm including connectors, w/o tripod and lens		
<b>Regulations</b>	CE, FCC Class A, RoHS (2011/65/EU)		

[Download Prosilica GT3400 technical drawing](#)

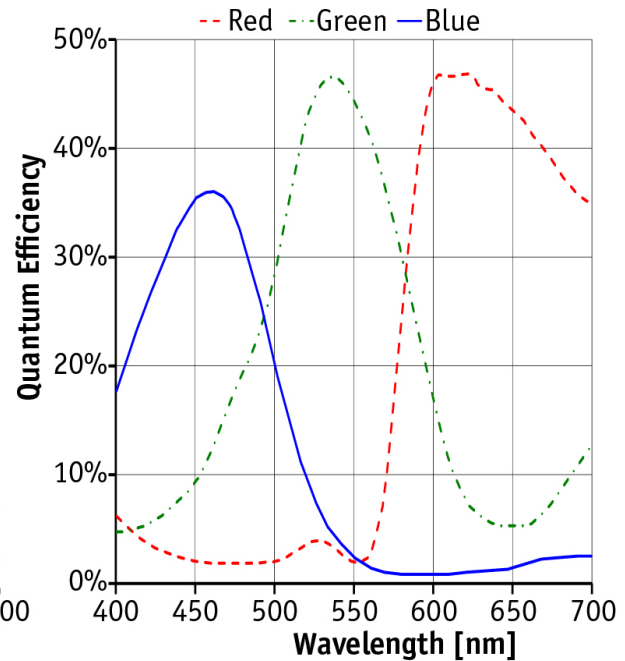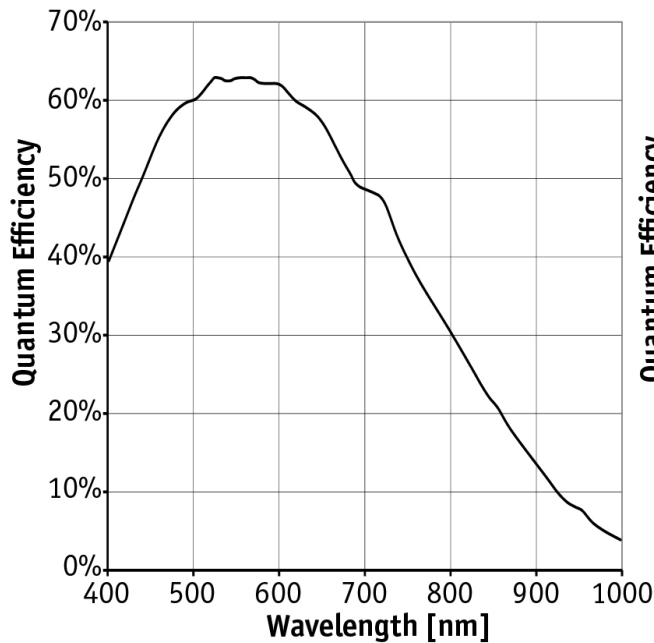

## Smart features

The Prosilica GT3400 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and Multiframe Acquisition Modes

## **Applications**

The Prosilica GT3400 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications